

## RB420D Rigid Box Maker



**ZHENGRUN**

品质铸造 正润品牌

### About ZHENGRUN:

Wenzhou Zhengrun Machinery Co., Ltd. established in July 1997 at Pingyang Zhenglou Industrial Area. It has standard factory 22,000 square meters, 200 employees, and has become the best manufacturer for rigid box and case maker machinery equipped with most advanced CNC tooling machines in China. We have rights of self-managed import and export. Our company has been admitted to ISO9001 Quality Management System Certificate. The products have been admitted to Europe CE Certificate. Our products have been exported to Europe, America, South Africa, the Middle East and the Southeast Asia, more than fifty countries and regions. There are an agency networks all over the world.

For many years' development, our company is devoted itself to developing and researching new products and offering quality products to customers from home and abroad. It always abides by the enterprise idea '**Quality Builds Zhengrun Brand**'. We are spare no effort to manufacturing quality products and prospering the enterprise.



---

Add: No.2, Chuangye Road, Zhenglou Industrial Area,  
Pingyang, Zhejiang Province, China 325400

Tel: +86-(0)577-58118885

Mobile: +86-1386841 2277

Fax: +86-(0)577-58118666

Website: [www.zheng-run.cn](http://www.zheng-run.cn)

Email: [market@zheng-run.cn](mailto:market@zheng-run.cn)

---


## I . Instruction

RB420D Rigid Box Maker is good equipment for making high-grade rigid boxes. It employs PLC, photoelectric detector system, touch screen man-machine interface to automatically finish feeding and gluing paper, positioning and wrapping box in one process. It is applicable to make high-grade boxes for shoes, shirts, jewelry, gifts, phone, perfume, etc.

## II . System Compositions

Product name: Rigid box maker

Model: RB420D

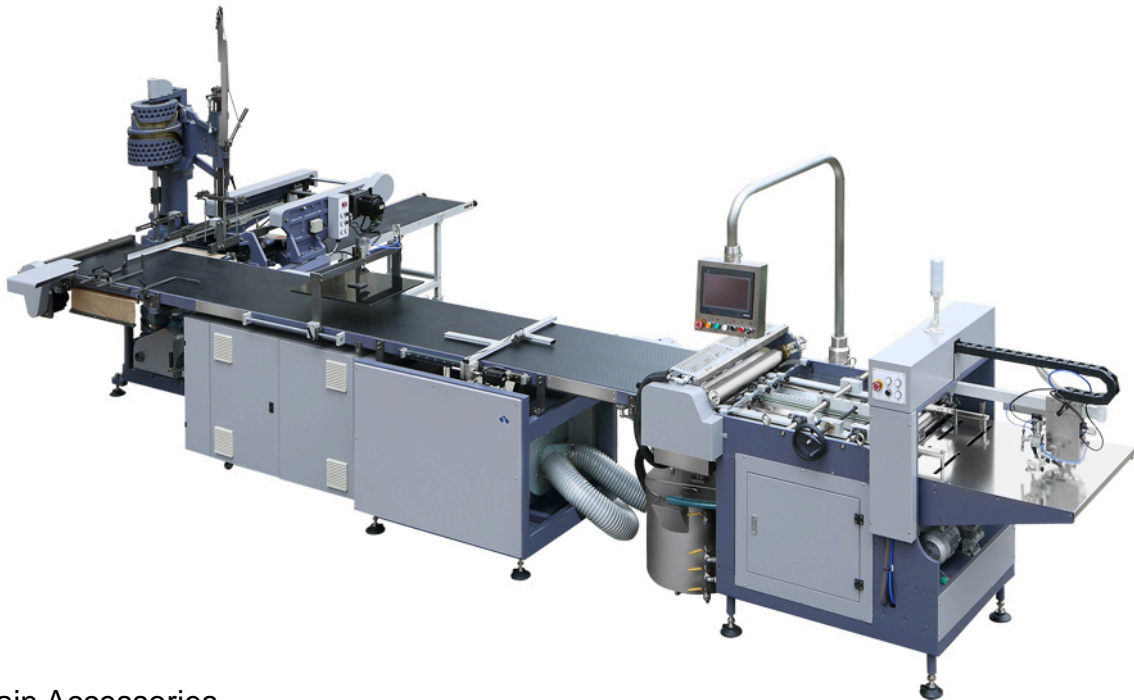

### 1. Main Accessories

- ◆ PLC System: Japanese Omron PLC, color touch screen 10.4 inch
- ◆ Transmission System: imported precise screw and guide transmission
- ◆ Electric Components: French Schneider
- ◆ Pneumatic Components: Japanese SMC
- ◆ Photoelectric Components: Japanese Omron
- ◆ Double Paper Sensor: Japan Kato
- ◆ Converter: Japanese Yaskawa,
- ◆ Conveyer Belt: Swiss Habasit
- ◆ Bearing: imported NSK/IKO
- ◆ Gluing cylinder: chromed Stainless steel

## 2. Basic Functions:

(1)The feeder in this machine adopts back-push feeding system, which is controlled pneumatically, and its structure is simple and reasonable.

(2)The width between stacker and feeding table is adjusted concentrically in the center. The operation is very easy without tolerance.

(3)New designed copper scraper cooperates with the roller more compactly, effectively avoiding paper winding. And the copper scraper is more durable.

(4)Adopt imported ultrasonic double paper tester, featuring in simple operation, which can keep two pieces paper from entering into the machine at the same time.

(5)Automatic circulation, mixing and gluing system for hot-melting glue. (Optional device: glue viscosity meter)


(6)The vacuum suction fan under the conveyer belt can keep the paper from deviating.

(7)The paper and cardboard inner box employs photoelectric sensor and servo motor to spot correctly.

(8)The wrapper can continually wrap, fold ears and paper sides and form in one process.

(9)The whole machine employs PLC, photoelectric tracking system and HMI to automatically forming boxes in one process.

(10)It can automatically diagnose the troubles and alarm accordingly.

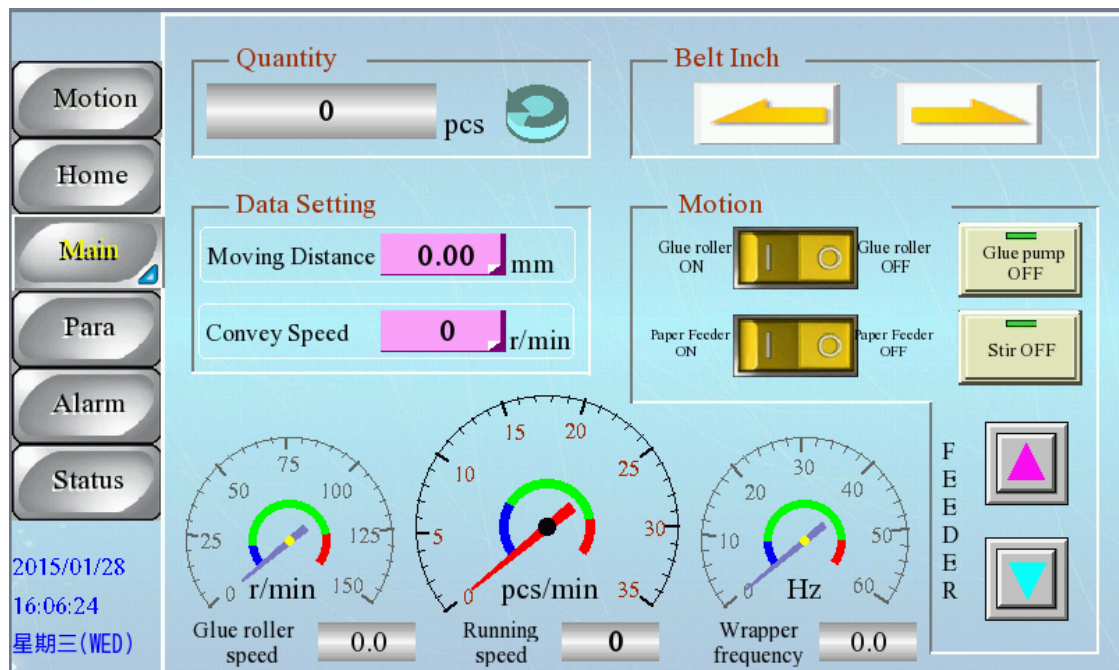

**Friendly Operation Interface**





### 3. Functions and Characteristics

The automatic rigid box maker is composed of Gluer, Spotter and Wrapper, which are controlled through a PLC in a linkage mode.

#### (1) Gluer (the paper gluing unit)

- ◆ Full-pneumatic feeder: simple construction, convenient operation, novel design, controlled by PLC, motion correctly.(this is the first innovation at home and it is our patented product.)

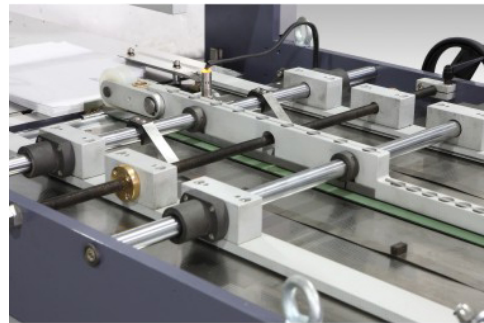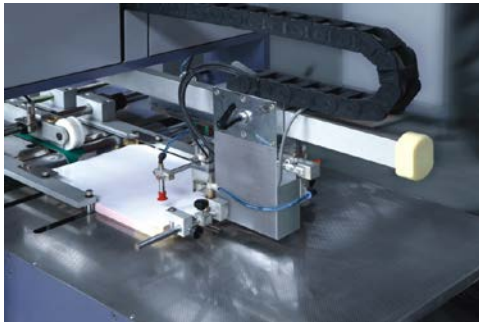

- ◆ It adopts ultrasonic double-paper detector device for the paper conveyor
- ◆ Paper rectifier ensures that the paper won't deviate after being glued
- ◆ Gluing cylinder is made of finely-grinded and chromium-plated stainless steel. It is equipped with line-touched type copper scrapers, more durable.



- ◆ Gel tank can automatically glue in circulation, mix and constantly heat and filter. With fast-shift valve, it will take only 3-5 minutes for the user to clean the gluing cylinder.

#### (2) Spotter

- ◆ The vacuum suction fan under the conveyer belt can keep the glued paper from deviating.
- ◆ Adopt simply constructed L-type positioning device, which reduces the working strength and makes the work much easier. Imported higher


precision photoelectric monitor

- ◆ Adopt lengthwise photoelectric tracking and servo rectifying device for positioning, which efficiently improves the precision of products.




### (3) Wrapper

- ◆ Servo controller mechanical box gripping device is easily adjusted.
- ◆ It adopts an innovative design --three curved surface cams, integrated on one main shaft, run in same direction simultaneously when machine works-- which makes motions more coordinate and adjustment easier.

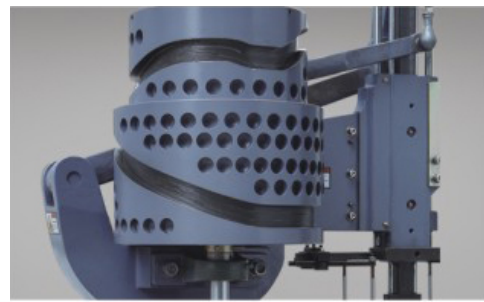

- ◆ Continual feed boxes, wrap sides, fold ears and fold paper side and form boxes in one process.

### III. Technical Parameter:

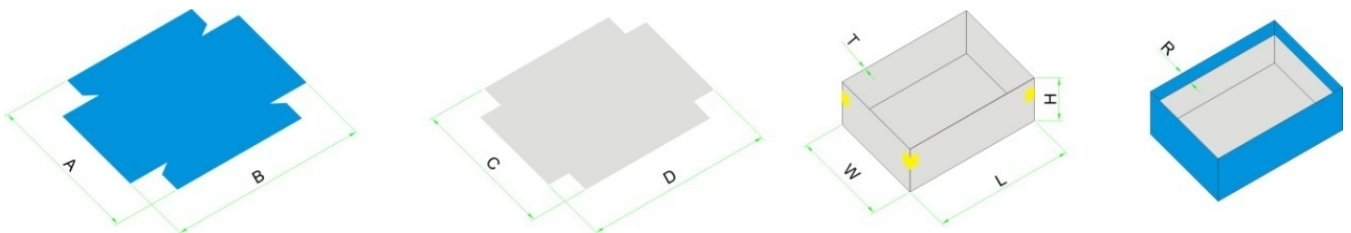

The corresponding relation between the specifications:


$$W+2H-4T \leq C(\text{Max})$$

$$L+2H-4T \leq D(\text{Max})$$

$$A(\text{Min}) \leq W+2H+2T+2R \leq A(\text{Max})$$

$$B(\text{Min}) \leq L+2H+2T+2R \leq B(\text{Max})$$

Production flow:

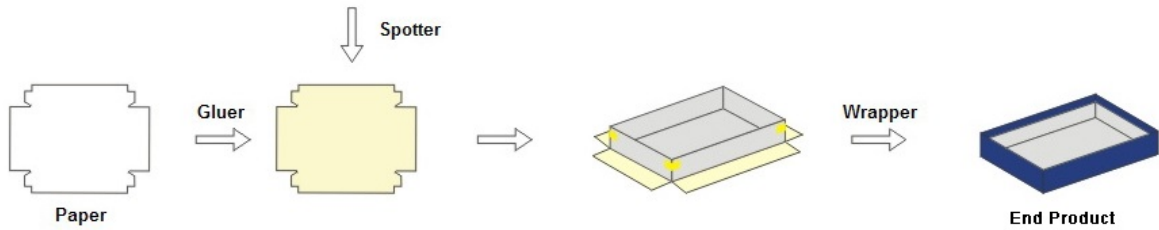


1	Paper size(AxB)	Amin	100mm
		Amax	580mm
		Bmin	200mm
		Bmax	800mm
2	Paper thickness	100-200g/m <sup>2</sup>	
3	Cardboard thickness(T)	1~3mm	
4	Finished product(box) size (WxL)	Max.	420x320mm
		Min.	100x50mm
5	Box Height(H)	10-120mm	
6	Folded paper size (R)	10-35	
7	Precision	±0.50mm	
8	Production speed	≅ 28sheets/min	
9	Motor power	13.6kw/380v 3phase	
10	Air Supply	10L/min 0.6Mpa	
11	Machine weight	2500kg	
12	Machine dimension	L6800xW2800xH2500mm	

Note:

- ◆ The max and mini sizes of the boxes are subjected to those of the paper and the quality of the paper
- ◆ The production capacity is 28 boxes per minute. But the speed of the machine depends on the sizes of the boxes
- ◆ Paper stacking height: 280mm (Max)
- ◆ Gel tank volume: 60L

Samples:

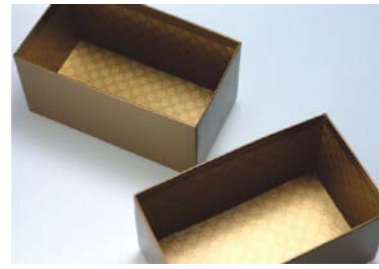

Add: No.2, Chuangye Road, Zhenglou Industrial Area,  
Pingyang, Zhejiang Province, China 325400

Tel: +86-(0)577-58118885

Mobile: +86-1386841 2277

Fax: +86-(0)577-58118666

Website: [www.zheng-run.cn](http://www.zheng-run.cn)


Email: [market@zheng-run.cn](mailto:market@zheng-run.cn)

#### IV. Important Observations for purchasing

##### 1. Requirements for Ground

The machine should be mounted on the flat and firm ground which can ensure it has enough capacity of load (about 500kg/m<sup>2</sup>). Around the machine should keep enough space for operation and maintenance.

##### 2. Size

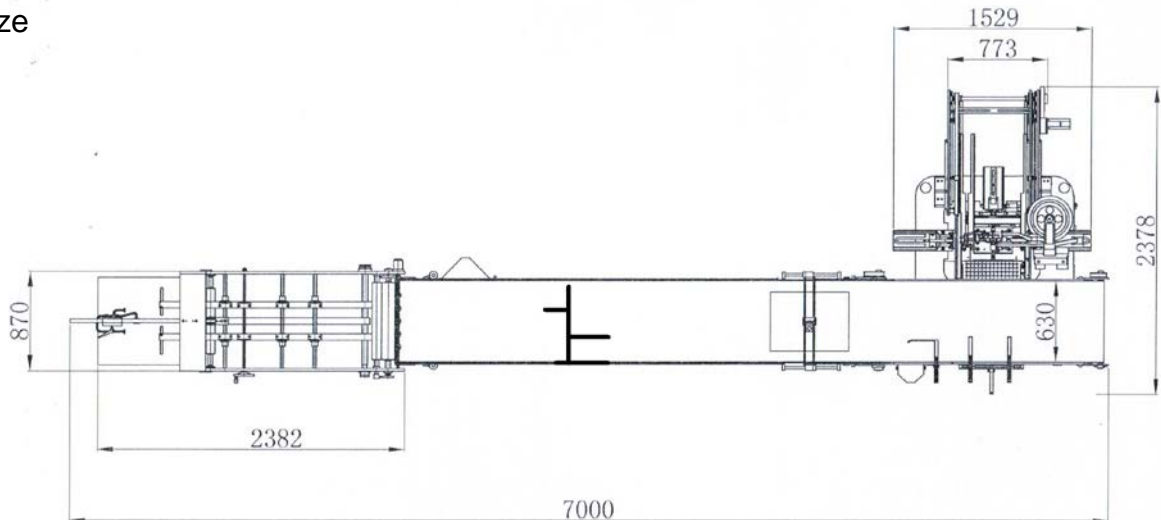

##### 3. Ambient Conditions

- ◆ Temperature: the ambient temperature should be kept around 18-24°C(The air-conditioner should be equipped in summer.)
- ◆ Humidity: The humidity should be controlled around 50%-60%.
- ◆ Lighting: above 300LUX that can ensure the photoelectric components can work regularly.
- ◆ To be away from oil gas, chemicals, acidic, alkali, explosive and inflammable substances.
- ◆ To keep the machine from vibrating and shaking and being next to the electric apparatus with high-frequency electromagnetic field.
- ◆ To keep it from being directly exposed to the sun.
- ◆ To keep it from being blown directly by the fan.

##### 4. Requirements for Materials

- ◆ Paper and cardboards should be kept flat all the time.
- ◆ The paper laminating should be electro-statically processed in double-side.


5. The color of the glued paper is similar to or same to that of the conveyor belt (black), and another color of glued tape should be stuck on the conveyer belt.

6. The power supply: 3 phase 380V/50Hz (sometimes, it can be 220V/50Hz、415V/Hz according to the actual conditions in different countries).

7. The air supply: 5-8 atmospheres (atmosphere pressure), 10L/min. The poor



quality of air will mainly resulted in troubles for the machines. It will seriously reduce the reliability and life of the pneumatic system, which will result in lager loss or damage that may terribly exceed the costs and maintenance of such system. Therefore it must be technically allocated with a good quality air supply system and their elements. The followings are the air purifying methods only for reference:

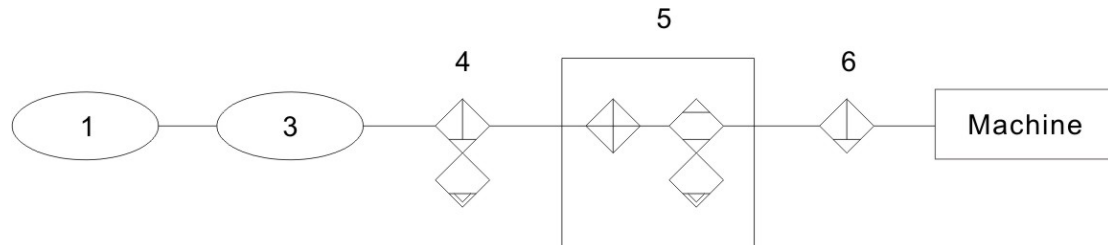

1	Air compressor		
3	Air tank	4	Major pipeline filter
5	Coolant style drier	6	Oil mist separator

- ◆ The air compressor is a non-standard component for this machine. This machine is not provided with an air compressor. It is bought by the customers independently.
- ◆ The function of the air tank:
  - a. To partly cool the air with higher temperature coming out from the air compressor through the air tank.
  - b. To stabilize the pressure that the actuator elements in the back uses for the pneumatic elements.
- ◆ The major pipeline filter is to remove the oil distain, water and dust, etc. in the compressed air in order to improve the work efficiency of the drier in the next process and to prolong the life of the precision filter and drier in the back.
- ◆ Coolant style drier is to filter and separate the water or moisture in the compressed air processed by the cooler, the oil-water separator, air tank and major pipe filter after the compressed air has been removed.
- ◆ The oil mist separator is to filter and separate the water or moisture in the compressed air processed by the drier.

8. Persons: for the sake of the safety of the operator and the machine, and fully taking advantage of the performance of the machine and reducing troubles and prolonging its life, 2-3 persons, skillful technicians capable of operating and maintaining machines should be assigned to operate the machine.

9. Auxiliary materials

- ◆ Glue: animal glue(jelly gel, Shili gel), specification: high speed fast dry style